




# TempTale®

## Maintain Precise Visibility of Your Cold Chain

Our precision temperature and humidity monitors let you track and collect data about your temperature-sensitive shipments. These highly reliable, electronic monitors enable you to make immediate accept or reject decisions, and gain greater visibility into every critical step of your cold chain.

### TempTale®4 (TT4) Monitor

Our flagship temperature monitor offers customizable alarm settings to meet the widest array of in-transit and storage applications. The functional design of the alarm integrates pre-programmed time and temperature limits to trigger “time-out-of-range” events. The monitor quickly and easily downloads to a PC for detailed time/temperature history by using fast, reliable optical communications.

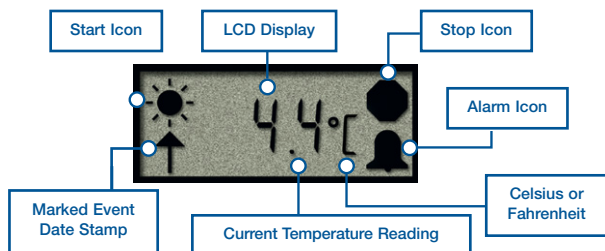

TempTale4 Specifications	
<b>Monitor Recording Options</b>	Single Use or Multi Use
<b>Temperature Measurement Range</b>	-30°C to 70°C (-22°F to 158°F)
<b>Temperature Accuracy Range</b>	±1.1°C from -30°C to -18°C (±2.0°F from -22°F to 0°F) ±0.5°C from -18°C to 50°C (±0.9°F from 0°F to 122°F) ±1.1°C from 50°C to 70°C (±2.0°F from 122°F to 158°F)
<b>TempTale4 BIO</b>	±0.22°C from -1°C to 10°C
<b>Temperature Resolution</b>	0.1°C/F over full temperature measurement range
<b>Memory Type</b>	Non-volatile 2K or 16K EEPROM options
<b>Data Storage Capacity</b>	1,920 or 16,000 data points
<b>Battery Life/Type</b>	1-year run life/3.0 V lithium battery
<b>Data Sampling Interval</b>	Programmable from 10 seconds up to a maximum of 2 hours
<b>Water-Resistant Housing</b>	IP 67, NEMA 6 Rating
<b>Start-Up Delay</b>	Minimum 0 seconds, maximum 194 days
<b>LCD Programmable Options</b>	Display current temperature reading, display temperature values in °C or °F, enable flashing of start, stop and alarm icons
<b>Start-Up Options</b>	Manual push button or automatic launch
<b>Alarm Function</b>	Programmable high and low limits; alarm is triggered when temperature exceeds set limits
<b>Typical Dimensions</b>	9.2cm L x 5.1cm W x 1.7cm H (3.6" L x 2.0" W x 0.67" H)
<b>Weight</b>	45.4 grams (1.6 ounces) approximate
<b>Testing</b>	Calibrated at 3 set points to NIST® traceable standards
<b>Quality Assurance Certifications</b>	CE; Validation Package
<b>Software/PC Interface</b>	TempTale Manager® Desktop; ColdStream®; Interface Plus Reader (for non-USB monitors)
<b>FAA Compliance</b>	RTCA/DO-160



## TT4 Humidity Monitor

With its integrated digital humidity sensor, the TT4 Humidity monitor is ideal for any application where relative humidity must be monitored. The TempTale4 Humidity monitor is designed for measuring and recording relative humidity from 10% to 100% RH and temperatures from -30°C to 70°C (-22°F to 158°F).

TT4 Humidity Monitor Specifications	
<b>Monitor Recording Options</b>	Single Use or Multi Use
<b>Temperature Measurement Range</b>	-30°C to 70°C (-22°F to 158°F)
<b>Humidity Measurement Range</b>	10% – 100% RH, non-condensing
<b>Temperature Sensor Accuracy Range</b>	±1.1°C from -30°C to -18°C (±2.0°F from -22°F to 0°F) ±0.5°C from -18°C to 50°C (±1.0°F from 0°F to 122°F) ±1.1°C from 50°C to 70°C (±2.0°F from 122°F to 158°F)
<b>Humidity Sensor Accuracy Range*</b>	±4.0% RH from 10 – 90%, ±5.0% RH from 90 – 100%
<i>*RH Accuracy stated within temperature exposure range of: 5.0°C to +60°C, non-condensing</i>	
<b>Temperature Resolution</b>	0.1°C/F over full temperature measurement range
<b>Relative Humidity Resolution</b>	0.4% RH from 10% to 100%
<b>Memory Type</b>	Non-volatile 16K EEPROM
<b>Data Storage Capacity</b>	Maximum 16,000 data points (8,000 temperature data points/8,000 RH data points)
<b>Battery Life/Type</b>	1-year run life/3.0 V lithium battery
<b>Data Sampling Interval</b>	Variable from 10 seconds up to 120 minutes
<b>Start-Up Delay</b>	Minimum 0 seconds, maximum 194 days
<b>LCD Programmable Options</b>	Displays current temperature and humidity data, max/min temperature and humidity data, and time-out-of-range data
<b>Start-Up Options</b>	Manual push button or automatic launch
<b>Alarm Function</b>	Temperature and humidity sensors can both be programmed to high and low limits
<b>Typical Dimensions</b>	10.2cm L x 5.1cm W x 2.5cm H (4.0" L x 2.0" W x 1.0" H)
<b>Weight</b>	48.2 grams (1.7 ounces) approximate
<b>Testing</b>	Calibrated at 3 set points to NIST® traceable standards
<b>Quality Assurance Certifications</b>	CE; Validation Package
<b>Software/PC Interface</b>	TempTale Manager® Desktop; ColdStream®; Interface Plus Reader
<b>FAA Compliance</b>	RTCA/DO-160



## TT4 Probeless Dry Ice Monitor

This monitor is designed to accurately record, monitor and archive temperature data of dry ice shipments. It is the industry's first self-contained probeless dry ice monitor with an LCD display. It can be placed directly into the dry ice environment in contact with the product and monitors temperatures as low as -80°C.

TT4 Probeless Dry Ice Monitor Specifications	
<b>Monitor Recording Options</b>	Single Use Only
<b>Temperature Measurement Range</b>	-80°C to 30°C (-112°F to 86°F)
<b>Temperature Accuracy Range</b>	±1.7°C from -80°C to 30°C (±3°F from -112°F to 86°F)
<b>Temperature Resolution</b>	0.1°C/F over full temperature measurement range
<b>Memory Type</b>	Non-volatile 2K or 16K EEPROM options
<b>Data Storage Capacity</b>	Maximum 1,920 or 16,000 data points
<b>Battery Life/Type</b>	1-year shelf life/7.2 V lithium battery
<b>Data Sampling Interval</b>	Variable from 10 seconds up to 15 minutes
<b>Start-Up Delay</b>	Programmable from 0 seconds up to 10 days
<b>LCD Programmable Options</b>	Displays max/min temperatures and time-out-of-range data
<b>Start-Up Options</b>	Manual push button or automatic launch
<b>Maximum Recording Period</b>	Continuous exposure to dry ice temperatures cannot exceed 30 days
<b>Typical Dimensions</b>	9.2cm L x 5.1cm W x 3.0cm H (3.6" L x 2.0" W x 1.2" H)
<b>Weight</b>	107.0 grams (3.8 ounces) approximate
<b>Testing</b>	Calibrated at 3 set points to NIST® traceable standards
<b>Quality Assurance Certifications</b>	CE; Validation Package
<b>Software/PC Interface</b>	TempTale Manager® Desktop; ColdStream®; Interface Plus Reader
<b>FAA Compliance</b>	RTCA/DO-160

Operating the monitor outside of published specifications can cause damage to the monitor.



Stainless steel probe and flexible probe models

### TT4 Monitor with External Temperature Probe

#### TT4 Dual Sensor Monitor also available

The TT4 monitor with external probe supports applications where a probe (stainless steel or flexible probe extended on a 1.5m / 5' cable) is required. The stainless steel probe can be placed into a liquid or an insulated package to capture the core temperatures while also monitoring the external ambient temperatures. This capability provides you with maximum application flexibility and extremely high levels of control and visibility into your in-transit temperature monitoring. The TT4 Dual Sensor option allows for both the internal and external sensors to be programmed to trigger "time-out-of-range" events.

TT4 Probe Monitor Specifications	
<b>Monitor Recording Options</b>	Single Use or Multi Use
<b>External Temperature Sensor Options</b>	Stainless steel probe (12.7cm / 5") with cable (1.5m / 5') or flexible probe with cable (1.5m / 5')
<b>External (Probe) Temperature Measurement Range</b>	-30°C to 70°C (-22°F to 158°F)
<b>External (Probe) and Internal Sensor Temperature Accuracy Range</b>	±1.1°C from -30°C to -18°C (±2.0°F from -22°F to 0°F) ±0.55°C from -18°C to 50°C (±1.0°F from 0°F to 122°F) ±1.1°C from 50°C to 70°C (±2.0°F from 122°F to 158°F)
<b>Temperature Resolution</b>	0.1°C/F over full temperature measurement range
<b>Memory Type</b>	Non-volatile 16K EEPROM
<b>Data Storage Capacity</b>	Maximum 16,000 temperature data points
<b>Battery Life/Type</b>	1-year run life/3.0 V lithium battery
<b>Data Sampling Interval</b>	Variable from 10 seconds up to 120 minutes
<b>Start-Up Delay</b>	Minimum 0 seconds, maximum 194 days
<b>LCD Programmable Options</b>	Displays max/min temperature data, time-out-of-range data, and current temperature data
<b>Start-Up Options</b>	Manual push button or automatic launch
<b>Alarm Function</b>	Programmable high and low alarm options, single or cumulative time-out-of-range events, or programmable above or below ideal temperature range
<b>Typical Dimensions</b>	10.2cm L x 5.1cm W x 2.5cm H (4.0" L x 2.0" W x 1.0" H)
<b>Weight</b>	99.2 grams (3.5 ounces) approximate, including probe
<b>Testing</b>	Calibrated at 3 set points to NIST® traceable standards
<b>Quality Assurance Certifications</b>	CE; Validation Package
<b>Software/PC Interface</b>	TempTale Manager® Desktop; ColdStream®; Interface Plus Reader
<b>FAA Compliance</b>	RTCA/DO-160



### TT4 Dry Ice Monitor

The TempTale4 Dry Ice monitor is used for monitoring in-transit and storage temperatures of pharmaceuticals, vaccines and frozen foods that need to be kept at consistently low temperatures to maintain their stability. This monitor features options for flexible or stainless steel probe on a cable (152.4cm, 5'). It can also be used to validate packaging and other components of your cold chain shipping and storage processes.

TT4 Dry Ice Monitor Specifications	
<b>Monitor Recording Options</b>	Single Use or Multi Use
<b>Probe Sensor Temperature Measurement Range</b>	-80°C to 30°C (-112°F to 86°F)
<b>Probe Sensor Accuracy Range</b>	±1.7°C from -80°C to 30°C (±3.0°F from -112°F to 86°F)
<b>Electronics Operating Range</b>	-30°C to 70°C (-22°F to 158°F)
<b>Temperature Resolution</b>	0.1°C/F over full temperature measurement range
<b>Memory Type</b>	Non-volatile 16K EEPROM
<b>Data Storage Capacity</b>	Maximum 16,000 temperature data points
<b>Battery Life/Type</b>	1-year run life/3.0 V lithium battery
<b>Data Sampling Interval</b>	Variable from 10 seconds up to 120 minutes
<b>Start-Up Delay</b>	Minimum 0 seconds, maximum 194 days
<b>LCD Programmable Options</b>	Displays max/min temperature data, time-out-of-range events above and below ideal temperature range, and current (probe) temperature data
<b>Start-Up Options</b>	Manual push button or automatic launch
<b>Alarm Function</b>	Single temperature event, continuous or cumulative time-out-of-range events above and below ideal temperature range
<b>Typical Dimensions</b>	9.2cm L x 5.1cm W x 2.5cm H (3.6" L x 2.0" W x 1.0" H)
<b>Weight</b>	99.2 grams (3.5 ounces) approximate, including probe
<b>Testing</b>	Calibrated at 3 set points to NIST® traceable standards
<b>Quality Assurance Certifications</b>	CE; Validation Package
<b>Software/PC Interface</b>	TempTale Manager® Desktop; ColdStream®; Interface Plus Reader
<b>FAA Compliance</b>	RTCA/DO-160

## TempTale Manager® Desktop Software

Desktop Software


TempTale Manager® Desktop (TTMD) is a multi-lingual, easy-to-use, Windows®-based software application for configuring, downloading, displaying, analyzing, and reporting time-and-temperature data collected from any of Sensitech's TempTale monitors. This versatile software is compatible with Windows® 7 and higher. Our TTMD software's extremely intuitive user interface makes it easy to retrieve, display, and analyze trip data, helping users to make higher quality

shipment disposition decisions and ensure that Standard Operating Procedures (SOPs) are delivering acceptable results. TTMD software's extensive multi-language support includes: US English, UK English, Spanish, Dutch, French, German, Portuguese, Chinese, Japanese, and Russian, and its powerful data export and file transfer options allow users to quickly and easily share data globally.


## TempTale Manager Desktop Features Summary




◀ **Summary View** displays statistical temperature and humidity data, such as minimums, maximums, standard deviation, mean kinetic temperature and "time- out-of-range" calculations.



◀ **Multi-Graph View** overlays graphs from up to 50 monitors onto the same graph to quickly highlight relationships between monitor data files.



◀ **Tabular View** displays detailed information for each data point including dates, times and temperature and humidity readings.



◀ **Graph View** plots temperature and secondary sensor data over time.

TempTale Manager Desktop includes powerful tools that allow users superior flexibility when sharing and exporting monitor data:

**Export to PDF** exports your data to portable document format (\*.pdf). Once exported, you can open the file using Adobe® Reader.

**Export to Excel** exports your data to the popular spreadsheet format (\*.xls). Once exported, you can open the file directly from Microsoft Excel.

**Email File** allows you to quickly email attachments of open views of monitor data in \*.pdf and \*.txt file formats directly from the TTMD application with a single mouse click.

## ColdStream® Hosted Data Management

Web-Enabled Software

ColdStream® is a validated, hosted, Internet-enabled software application which provides secure, centralized storage for time-and temperature records in a relational database repository designed to comply with 21 CFR Part 11. This powerful software enables users to share critical data quickly and efficiently through password-protected, selective

access—across their own organization as well as with business partners. ColdStream provides cold chain data analysis, reporting, and potential opportunities for process improvement. The reporting and analysis services are delivered through Sensitech's Professional Services team.

Sensitech Inc. is focused on delivering supply chain visibility solutions that track, monitor and protect products for global leaders in the food, life sciences, consumer goods, and industrial markets. Our solutions are focused in three key areas: quality and compliance, supply chain security, and logistics performance management. Quality and compliance solutions address temperature-sensitive, complex supply chains focused on delivering the highest quality possible, while our supply chain security solutions help to mitigate risks associated with theft, diversion and chain of custody. Sensitech's logistics performance solutions deliver origin-to-destination, real-time transparency to any in-transit journey. Sensitech Inc. is an ISO 9001:2015 company, headquartered in Beverly, Mass., with over 35 sales, service and distribution locations around the world. Sensitech is a Carrier company, a leading provider of heating, air conditioning and refrigeration systems, building controls and automation, and fire and security systems leading to safer, smarter, sustainable and high-performance buildings. Unless otherwise indicated, all trademarks and service marks are the property of Sensitech Inc. Visit [www.sensitech.com](http://www.sensitech.com) for additional information. ©2020 Carrier. All Rights Reserved. NIST is a registered trademark of The National Institute of Standards and Technology Agency of the United States Government.

Sensitech Inc. • Global Headquarters • 800 Cummings Center • Suite 258X • Beverly, MA 01915-6197  
1-800-843-8367 • +1-978-927-7033 • Fax: +1-978-921-2112 • [sensitech.clientservices@carrier.com](mailto:sensitech.clientservices@carrier.com)