

TempTale® Ultra

TempTale® Ultra Probe Monitor

TempTale® Ultra monitor with detachable probe for monitoring shipments, freezers and refrigerators without opening the carton or doors


The TempTale® Ultra Probe monitor is an ideal solution for monitoring in-transit and ambient storage temperatures for Life Sciences products between -30°C to $+70^{\circ}\text{C}$ to maintain stability. The detachable probe is 1.5 meters in length, perfect for monitoring temperature close to the product inside shippers or refrigerators. The TempTale Ultra Probe monitor allows supply-chain partners such as customs agents, third-party logistics (3PL) providers, distributors, and hospitals to disconnect/reconnect the probe in order to assess temperature data and alarm status without opening the carton or refrigerator.

The TempTale Ultra Probe monitor allows the temperature probe to remain undisturbed throughout the entire journey. For shipping lanes involving customs agents, this is a must-have requirement (i.e., Saudi Arabia FDA Regulations). The detachable probe enables receivers to read the LCD status immediately, thereby expediting decisions at the dock. The TempTale Ultra Probe monitor is available in Single Use, Single Use Overwrite, and Multi Use recording options.

Features and Benefits

- External ambient probe allows customers to record temperatures inside packaging or fridges and view key temperature indicators on the monitor's LCD outside of the package without opening the container.
- Temperature monitoring remains more stable now that the probe can remain next to the product inside the shipper, while the actual USB monitor remains on the outside for easy data downloading.

- Direct USB connection to PC—no proprietary reader or USB adapter needed to access data stored on monitor.
- PDF options are configurable: selectable time zones and languages enhance usability at international receiving sites.
- Matching serial numbers on core device and probe prevent handling errors.

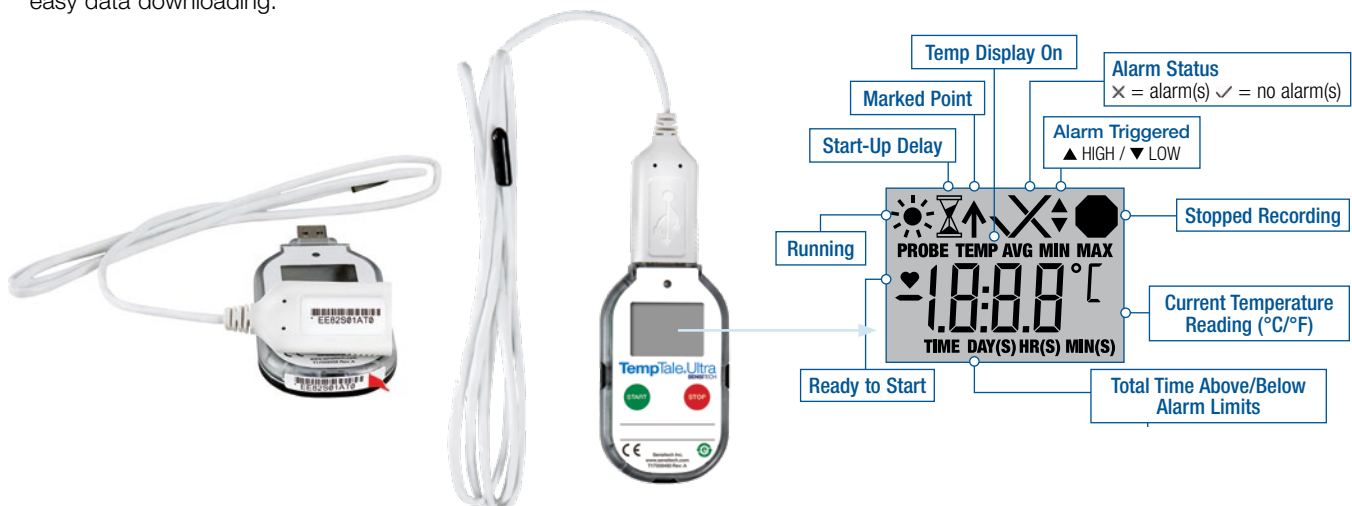

TempTale Ultra Probe Specifications	
Monitoring Recording Options	Single Use, Single-Use with User Programmable Overwrite, or Multiple Use
Probe Temperature Measurement Range	-30°C to +70°C
Probe Sensor Accuracy Range	± 0.5°C from -10°C to +45°C ± 1.0°C from -30°C to -10°C ± 1.0°C from +45°C to +70°C
Monitor Operating Range	-30°C to +70°C
Temperature Resolution	0.1°C over full temperature measurement range
Data Memory Type	Non-volatile 16K Flash memory
Data Storage Capacity	16,000 data points (16K)
Battery Life / Type	12 months operating life / 3.6v lithium battery
Data Sampling Interval	Programmable from 30 seconds up to a maximum of 120 minutes
Water Resistant Housing	IP64 (with detachable probe connected to monitor)
Start Up Delay	0 minutes to 24 hours
Programmable Alarms	<ul style="list-style-type: none"> • High and low limits – alarm is triggered when temperature exceeds set limits; • Multi Alarm – up to six: single temperature limit, temperature range, dual temperature range, MKT, duration
Alarm Delay Time Thresholds	Single event (continuous) or cumulative
LCD Indicators	Started, start-up delay, running, stopped; Alarm status: OK (✓), Alarmed (✗); Trip summary data (average, minimum, maximum); Current temperature reading; Time remaining / time elapsed against alarm-time thresholds; PROBE; Flashing X when probe disconnects from monitor cable
Cable Length Options	1.5m
Outer diameter of cable (typical)	3.5mm
Start Up Options	Manual push button or automatic launch option
Weight	90.7 grams (includes monitor with 1.5m probe)
Quality Assurance Certifications	CE, RTCA – D0160G compliant, RoHS compliant, Response time tested to U.S. Pharmacopeia (USP) <1118> and EN 12830 standards; 3-point NIST® Traceable Certificate of Calibration; Validation Manual
Minimum System Requirements	Windows® PC w/ Windows® 7 Pro (64-bit) or higher; Adobe® Reader 9.0 or higher
Data Analysis and Cold Chain Continuous Improvement Software	TempTale Manager® Desktop 8.0 or higher; ColdStream® Cold Chain Manager 1.8B or higher; ColdStream® Web 1.3.1
Computer Interface	USB 2.0, A-type plug

Sensitech has performed all necessary testing and can provide documentation supporting our compliance at your request.

Sensitech Inc. is focused on delivering supply chain visibility solutions that track, monitor and protect products for global leaders in the food, life sciences, consumer goods, and industrial markets. Our solutions are focused in three key areas: quality and compliance, supply chain security, and logistics performance management. Quality and compliance solutions address temperature-sensitive, complex supply chains focused on delivering the highest quality possible, while our supply chain security solutions help to mitigate risks associated with theft, diversion and chain of custody. Sensitech's logistics performance solutions deliver origin-to-destination, real-time transparency to any in-transit journey. Sensitech Inc. is an ISO 9001:2015 company, headquartered in Beverly, Mass., with over 35 sales, service and distribution locations around the world. Sensitech is a Carrier company, a leading provider of heating, air conditioning and refrigeration systems, building controls and automation, and fire and security systems leading to safer, smarter, sustainable and high-performance buildings. NIST is a registered trademark of The National Institute of Standards and Technology Agency of the United States Government. Microsoft, Windows, Windows XP, Windows Vista, and Internet Explorer are registered trademarks of Microsoft Corporation in the United States and other countries. Adobe is a registered trademark of Adobe Systems Incorporated in the United States and/or other countries. Unless otherwise indicated, all trademarks and service marks are the property of Sensitech Inc. Visit www.sensitech.com for additional information. ©2020 Carrier. All Rights Reserved.

Sensitech Inc. • Global Headquarters • 800 Cummings Center • Suite 258X • Beverly, MA 01915-6197
1-800-843-8367 • +1-978-927-7033 • Fax: +1-978-921-2112 • sensitech.clientservices@carrier.com