

# VizComm™ Prime

## *Instructions for Use*



[sensitech.com](http://sensitech.com)



Sensitech Inc. Global Headquarters • 800 Cummings Center, Suite 258X • Beverly, MA 01915-6197  
+1-800-843-8367 • +1-978-927-7033 • Fax 978-921-2112 • [sensitech.clientservices@carrier.com](mailto:sensitech.clientservices@carrier.com)

© 2020 Carrier. All Rights Reserved.




A Carrier Company


T83006664 Rev. E • 23 Sept 2020

## Front of Housing

1. Start Button
2. Stop Button
3. Airplane Button
4. LCD Display
5. Light Sensor
6. Temperature Sensor
7. LED

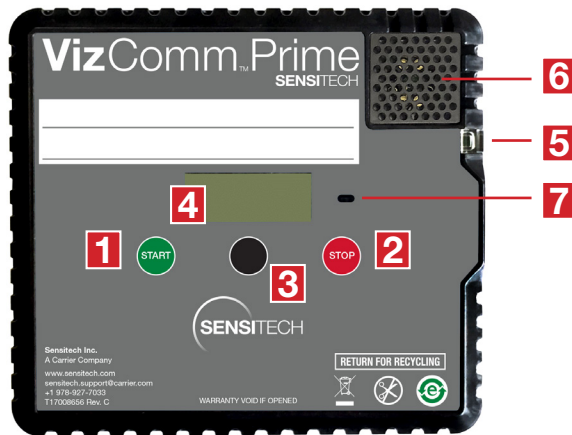

## LCD Icons

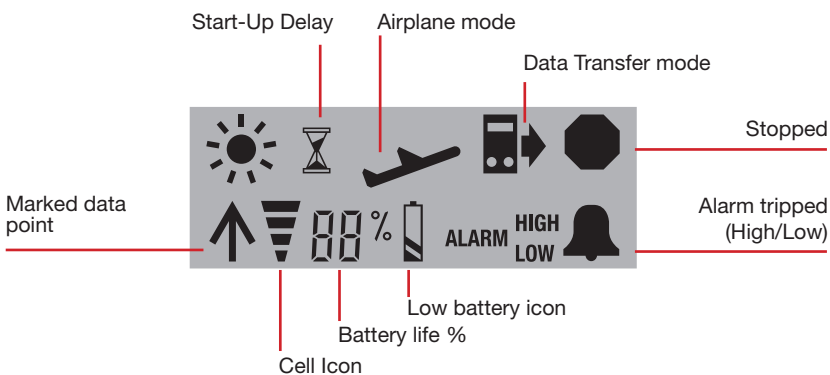

## Mounting the Monitor

The preferred mounting position is to place the device on top of a pallet. To do this, peel off the protective covering from the two double-sided Velcro pads and attach the monitor to the mounting surface.

## Starting the Monitor

1. Press and hold the **green** Start button **(1)** for several seconds until the spinning initialization icon [ ] is visible on the LCD display.
2. The LED **(7)** will blink **green** rapidly for a few seconds.
3. PLACE ON SHIPMENT when the sun icon ☀️ is visible on the LCD display.
4. DO NOT USE THE MONITOR if the sun icon is **NOT** visible and/or the LED **(7)** blinks **red**.

## Stopping the Monitor

1. Press and hold the **red** STOP button **(2)** for several seconds.
2. The stop icon ⬛ will be visible on the LCD display indicating that the monitor has been stopped.

## Checking the Battery Level

1. Press and release the black button **(3)**.
2. The battery level 88% will be displayed.

## Using Airplane Mode

When in Airplane Mode the monitor continues to record temperature and the radio is turned off.

Starting Airplane Mode – Radio is turned off

1. Press and hold the **black** button **(3)** and **green** START button **(1)** simultaneously for several seconds.
2. The visible airplane icon ✈️ will indicate that the monitor is in Airplane Mode.

Stopping Airplane Mode – Radio is turned on

1. Press and hold the **black** button **(3)** the **red** STOP button **(2)** simultaneously for several seconds. To avoid accidentally stopping the monitor, press the black button slightly before STOP button.
2. The airplane icon in the LCD display will turn off. The monitor is now in normal run mode.